

Pasta Cooker CPG-I



STANDARD FEATURES

- Single chamber in 18/10 stainless steel.
- 304 and 316 series stainless steel construction.
- 12 gallon water capacity per tank chamber.
- Triple fiberglass insulation on all sides.
- Seamless stainless steel baskets with specially designed perforated holes.
- Multiple basket size configurations.
- Specially designed burner creates a water current flow that lifts starch carrying it out to the overflow drain.
- Automatic pilot.
- Top mount water faucet for continuous clean water flow.
- 45,000 BTU per chamber burner.
- · Adjustable legs.
- A.G.A. and NSF approved.

OPTIONS

- Electric model.
- Double chamber.
- Triple chamber.
- Multiple basket size configuration in stainless steel.
- Automatic lift mechanism.
- Casters.


II LIVI.		
PROJECT:		

ITEN/I

Pasta Cooker CPG-1



Pasta Cooker CPG-I

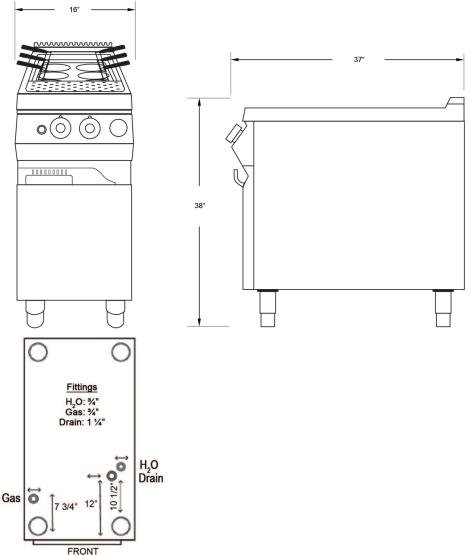

MODEL	UNIT DIMENSION W x D x H	TANK DIMENSION W x D x H	CAPACITY (GAL.)	WT.	SHIP WT.	K.W.	V.	PH.	HZ.	AMPS	H ₂ O	GAS	DRAIN	BTU	WATER COLUMN
CPG 1 (GAS)	- 16" x 37 x 38	12" x 20 x 12	12 gal.	jal. 130 Ibs.	160	Х	X	X	Х	Х	3/4"	3/4"	- 1 ¼"	45,000	4 ½"
CPG 1 (ELECTRIC)		12 X 20 X 12	12 yai.		lbs.	8.4	220	3	60	40	3/4"	Х		Х	Х



Rosito Bisani Imports, Inc.

940 South La Brea Avenue, Los Angeles CA, 90036 Tel: 323-937-1888 • Fax: 323-938-0728 • Toll Free: 1-800-848-4444 E-mail: sales@rosito-bisani.com

www.rosito-bisani.com

530 South Henderson Road, Suite F, King of Prussia PA, 19406 Tel: 610-265-5950 • Fax: 888-576-8524



