

ROW SERIES BACK COUNTERS

REFRIGERATED OPEN WALL DISPLAY

STANDARD FEATURES

- Free standing or wall mounted stainless steel cooler
- Finish in high polish stainless steel interior and exterior
- Rounded corners inside the model
- Heat insulation with ecological polyurethane foam
- Height adjustable intermediate glass shelf
- Removable stainless steel bottom grids
- Internal LED lighting system
- Ventilated refrigeration with central evaporator
- Thermostatic valve
- Digital control panel supplied
- Sustaining bars with easy mounting system

OPTION

- Epoxy paint over stainless steel
- Water cooled condensing unit
- Open wall display without wall panel



REFRIGERATED OPEN WALL DISPLAY SPECIFICATIONS

MODELS	LENGTHS	DEPTHS	HEIGHT	WEIGHTS (LBS)	REMOTE BTU'S +35°F	* VOLTAGES	AMPS
ROW1000	39 3/8" (1000mm)	27 3/16" (690mm)	92 1/2" (2350mm)	143	2730	120	5
ROW1500	59 1/16" (1500mm)	27 3/16" (690mm)	92 1/2" (2350mm)	185	4100	120	6
ROW2000	78 3/4" (2000mm)	27 3/16" (690mm)	92 1/2" (2350mm)	220	5460	120	7

* REMOTE CONDENSING UNIT NOT SUPPLIED




361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com




ROW SERIES BACK COUNTERS

REFRIGERATED OPEN WALL DISPLAY

**STANDARD:
OPEN WALL DISPLAY
WITH WALL PANEL**

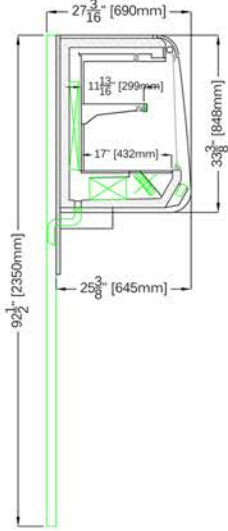

**OPTIONAL:
OPEN WALL DISPLAY
WITHOUT WALL PANEL**




ROW1000



ROW1500



ROW2000




**OPTIONAL: OPEN WALL DISPLAY
WITHOUT WALL PANEL**




PLAN VIEWS


ROW1000



ROW1500



ROW2000




FRONT ELEVATIONS (CUSTOMER SIDE)

ROW1000



ROW1500

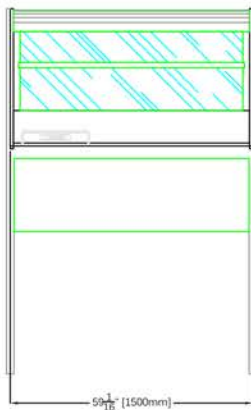

ROW2000

